




# Braukmann BA298I-F

## Reduced-pressure-zone backflow preventers with flanged connections - Industrial model

### Product specification sheet

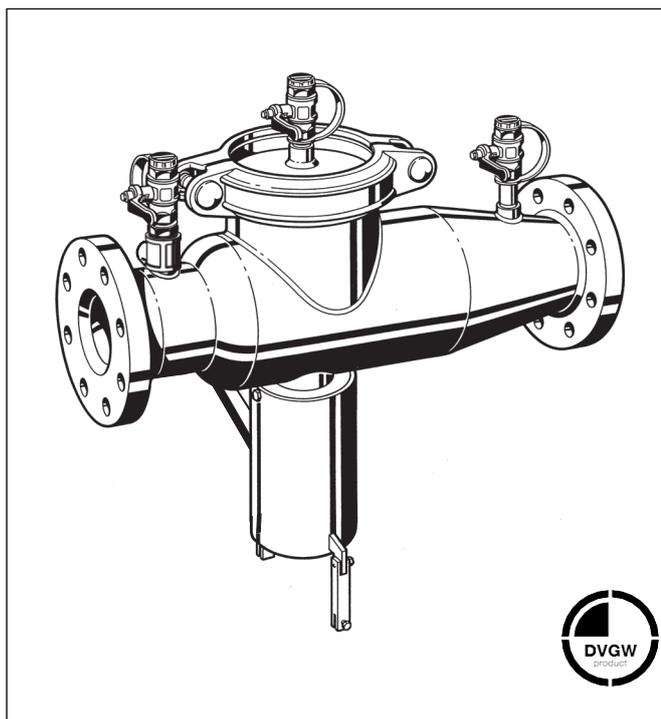

#### Application

Backflow preventers of this type are suitable for the protection of drinking water systems against back pressure, back flow and back syphonage.

Fluids up to and including liquid category 4 to EN 1717 are protected.

They can be used for residential buildings, industrial and commercial purposes within the scope of their specification. The stainless steel housing provides increased corrosion protection.

#### Special Features

- DVGW-, WRC- and SVGW-certified for all connection sizes
- Optimal protection of the drinking water supply system
- Easy access to all internal components
- Easy Maintenance due to optimized construction
- Triple security - two check valves and a discharge valve separate the backflow preventer into three pressure zones
- Few individual parts
- Light weight
- Standardised discharge connection
- Meets KTW regulations for potable water

#### Construction

The backflow preventer consists of:

- Housing
- Inlet and outlet check valves
- Discharge valve
- Three ball valves for the connection of a differential pressure gauge

#### Materials


- Stainless steel housing
- Stainless steel check valves
- EPDM diaphragm
- EPDM sealing washers
- Stainless steel discharge valve
- Stainless steel pressure control line
- Stainless steel ball valves

#### Range of Application

Medium	Water
Operating pressure	10.0 bar
Minimum inlet pressure	1.5 bar

#### Technical Data

Installation position	Horizontal with discharge valve downwards
Max. operating temperature	65 °C
Discharge pipe connection	DN150
Connection size	DN65 - DN150

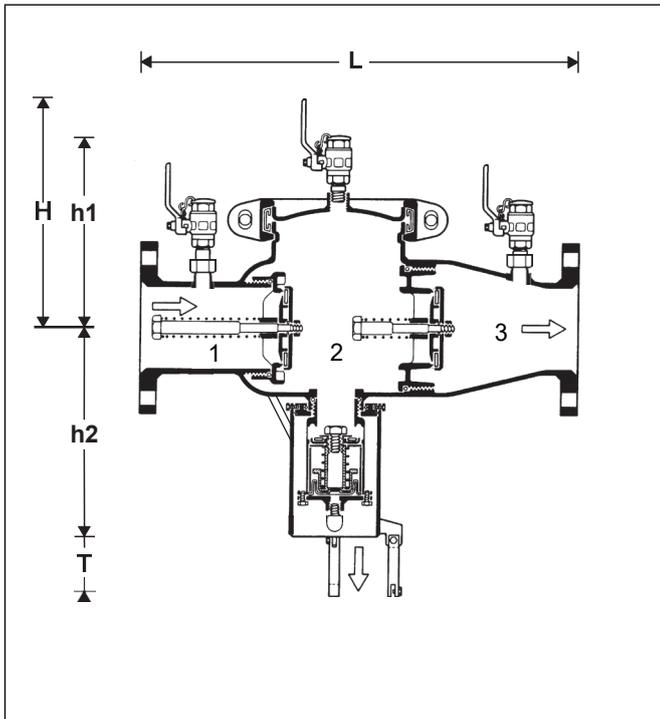

**Method of Operation**

BA type backflow preventers are divided into three pressure zones. The pressure in zone 1 is higher than in zone 2, which in turn is higher than in zone 3. A discharge valve is connected to zone 2 which opens at the latest when the differential pressure between zones 1 and 2 drops to 0.14 bar. The water from zone 2 discharges to atmosphere, both check valves close and therefore separate zone 2 from zone 1 and 3. In this way the danger of back pressure or back syphonage into the supply network is prevented. The pipework connection is interrupted and the drinking water network is protected.


**Options**

BA298I-... FA = Standard version with PN 10 flanges, connection sizes DN 65 - 150

BA298I-... FZ = Special version, drill pattern on flanges according to ANSI150, connection sizes DN 65 - 150

Connection size

Connection size	DN	65	80	100	150
Weight	approx. kg	32	32,5	33	57
Dimensions	mm				
	L	559	559	559	695
	H	245	245	245	285
	h	270	270	270	300
	T	60	60	60	60
Nominal flow rate at $\Delta p = 1 \text{ bar}$	m <sup>3</sup> /h	45	54	85	191
Discharge flow rates in the event of failure	m <sup>3</sup> /h	35	35	35	35
DIN/DVGW Registration No.		NW-6305CO0318			

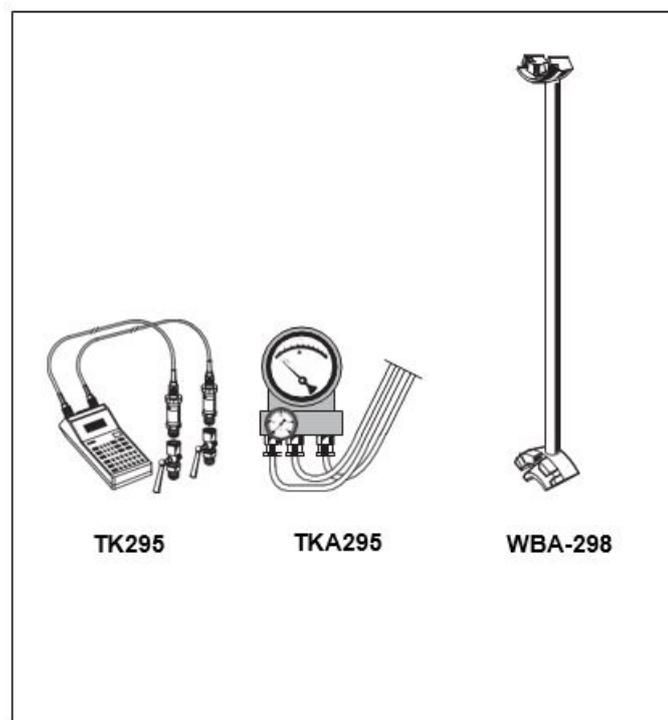

**Accessories**

**TK295 Test kit**

Electronic pressure measuring device with digital indicator, battery-operated.

With case and accessories, ideal for inspection and maintenance of backflow preventer type BA.

**TKA295 Test kit**

Analogue pressure measuring device with differential pressure display.


With case and accessories, ideal for inspection and maintenance of backflow preventer type BA.

**WBA-298 Check valve replacement tool**

WBA-298-100 for connection sizes DN 65 - 100

WBA-298-150 for connection size DN 150

Installation Example

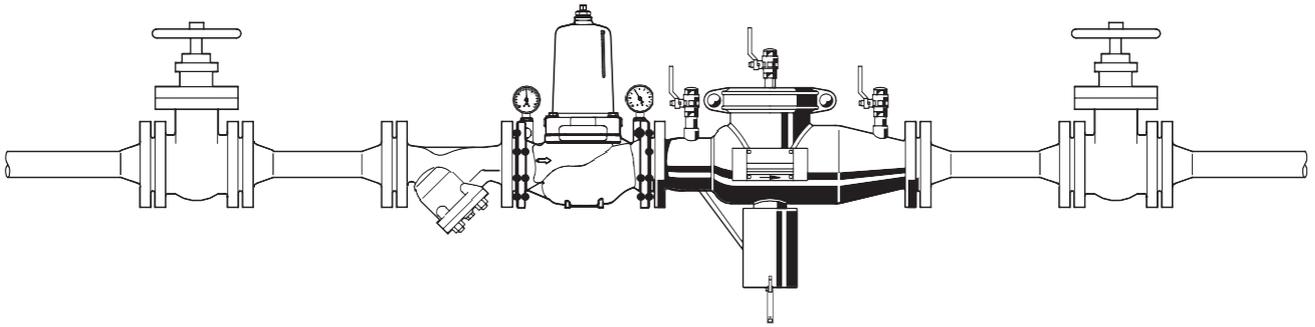

Connection size	DN	65	80	100	150
Minimum clearance above backflow preventer	(mm)	650	650	650	650
Clearance from wall	(mm)	160	160	160	200

Installation Guidelines

- Install shutoff valves before and after backflow preventer
- Install in horizontal pipework with the discharge valve downwards
- Ensure good access
  - Simplifies maintenance and inspection
- Do not install in places where flooding can occur
- The installation environment should be protected against frost and ventilated well
- Install discharge pipework which has adequate capacity

Typical Applications


Backflow preventers are ideally suited for industrial and commercial applications.


However they can also be used for supplies to residential buildings within the scope of their specification.

The following are some typical applications:

- Chemical mixing plant
- Chemical cleaning appliances
- Softening and deacidification plant without DVGW approval. Regeneration with and without acid and alkaline solutions. Disinfection with Formalin
- Film development plant without DVGW certification
- Galvanic bath
- Beverage industry (i.e. Breweries)

Flow Diagram

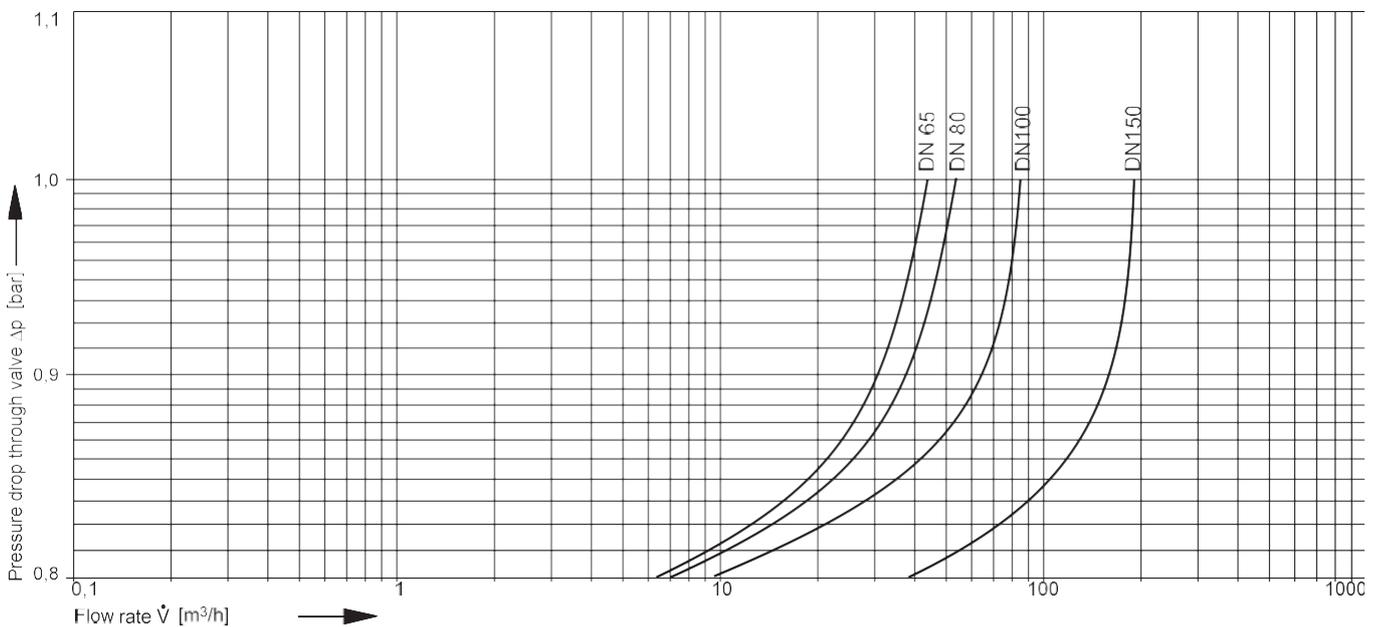

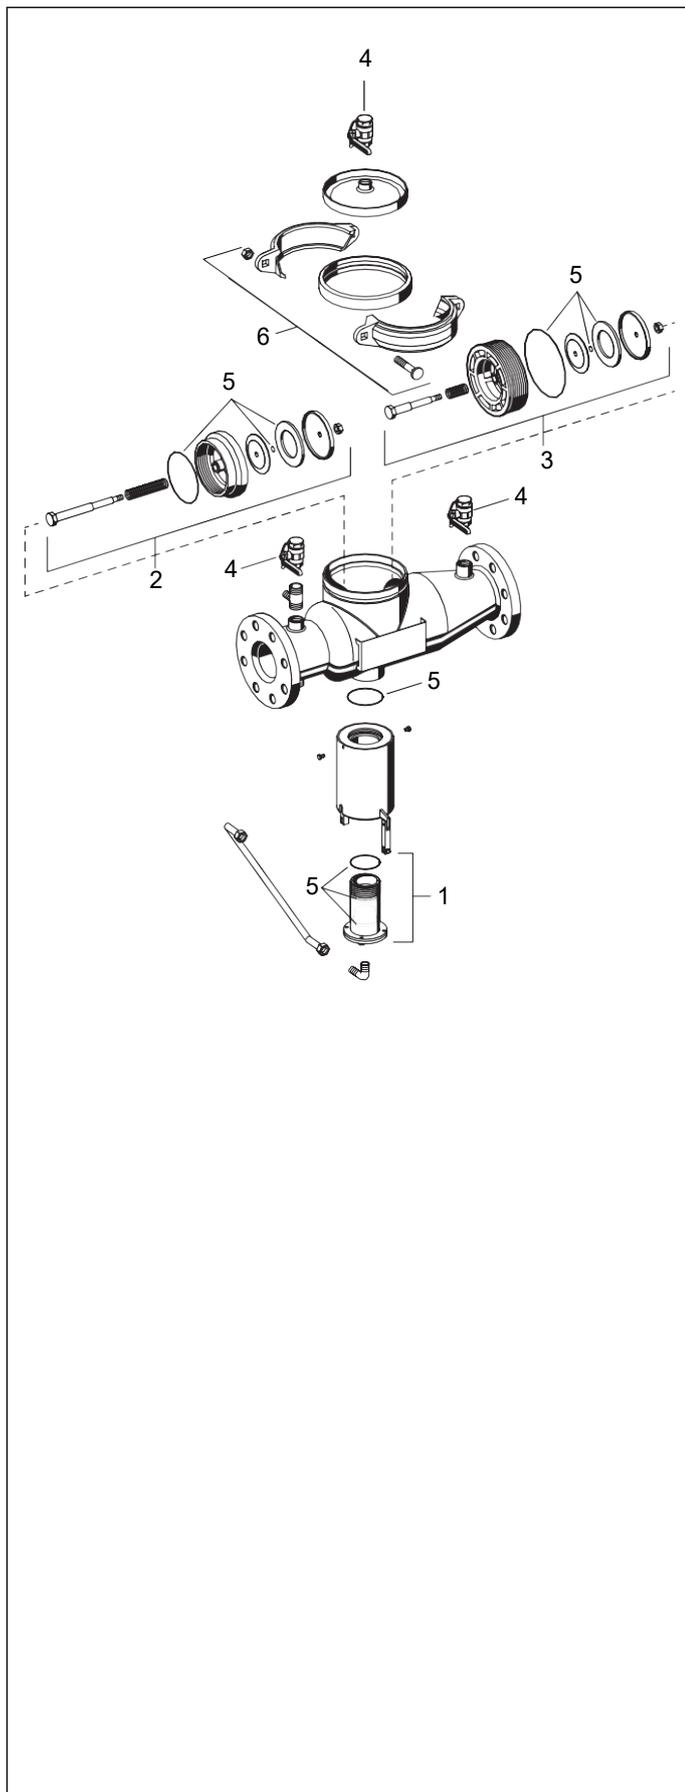

Spare Parts

Backflow Preventer BA2981-F, from 2008 onwards

No.	Description	Dimension	Part No.
1	Discharge vlave	DN65 -150	0901856
2	Inlet ckeck valve	DN65 -100 DN150	0901652 0901656
3	Outlet check valve	DN65 -100 DN150	0901653 0901657
4	Ball valve	DN65 -150	0901662
5	Sealing set	DN65 -100 DN150	0904031 0904032
6	Clamp complete	DN65 -100 DN150	0904033 0904034